



PRISMA **2x11kW & 2x22kW**



MC CHARGERS

"Your Journey, Our Commitment."

PRISMA 2x11kW & 2x22kW WITH 2 AC

Single-phase and three-phase Public & Commercial charger with two AC charging outputs.

- 2 x MID Meter
- SPD Type 2
- 2 x RCD Type B
- 2 x 4.3" LCD
- WiFi, Ethernet, GSM
- S2W OCPP 1.6 Json
- RFID
- IP55, IK10
- 2 years warranty
- Dynamic Load Management
- Remote Firmware Updates
- Industrial Relay 4P

Charging Output:	2 AC
Max. Output Power:	22kW or 44kW
Display:	2 x LCD 4.3"
Installation:	Ground or Wall mounted
Network Connection:	WiFi, Ethernet or GSM
Communication Protocol:	S2W and OCPP 1.6Json


- Easy use, install, upgrade and remote firmware update.
- Compatible with all electric cars on the market.
- Ideal for private installations such as stores, parking, gas station, shopping malls, hotel, points on the national and international roads.
- Electrostatically painted Steel & polycarbonate.
- RFID or phone app user identification.
- All protective devices are integrated in the charging station providing an easy, quick, safe and low cost installation.
- Ability to charge 2 cars simultaneously with 11/22kW each.

PRISMA 2x11CG, 2x22CG



With 5m Mode 3 tethered cable Type 2

2x Built in 5m (or 7m upon order) length, Mode 3, tethered cable with Type 2 outlet for easy and fast connection with the electric vehicle.

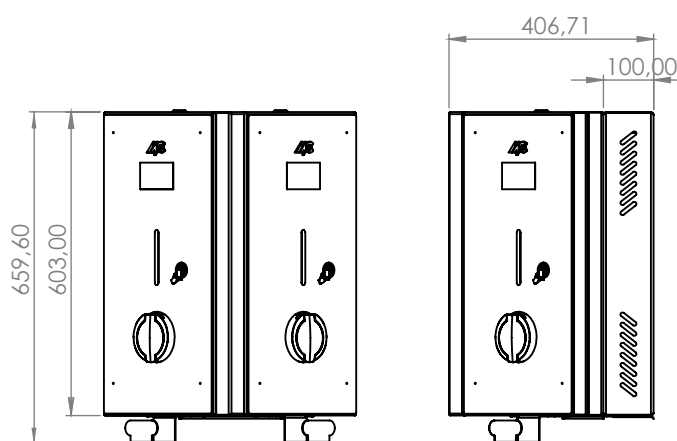

PRISMA 2x11CS, 2x22CS



With Type 2 Socket Outlet

2x Type 2 socket outlet with protective cap and locking mechanism.

BASE2x22



Possibility of mounting the PRISMA charger on a pedestal metal base (BASE 2x22).

Technical Specifications		PRISMA 2x11CS 2x11CG		PRISMA 2x22CS 2x22CG	
AC Input Characteristics	AC Input Voltage	400VAC ± 10%			
	Input Type	3P + N + PE			
	AC Input Current	32A / phase		63A / phase	
	Frequency	50 Hz			
AC Output Characteristics	AC Voltage Output	400VAC			
	Power	22kW max (11kW in each output)		44kW max (22kW in each output)	
	AC Output Current	16A / phase in each output		32A / phase in each output	
Operating Conditions	Operating Temperature	-25°C - +65°C (derating of power above +50°C)			
	Storage Temperature	-40°C - +70°C			
	Humidity	5% - 95% RH (no condensation)			
	Installation Altitude	Up to 2000m			
Construction	Enclosure	Electrostatically painted Steel, Polycarbonate *			
	IP Protection	IP55			
	Mechanical Impact IK	IK10			
	Display	2 x LCD 4,3" (for each output)			
	Charging Mode	Mode 3			
	Outputs	2 outputs – 2xSocket outlet Type 2 with protective cap and locker or built in 5m (or 7m) length tethered cable with Type 2 output **			
	Charger Dimensions (ground mounted)	510x605x1410mm (width x height x depth)			
	Weight	Ground mounted with BASE 2x22	Wall mounted	Ground mounted with BASE 2x22	Wall mounted
		60kg	35kg	60kg	35kg
	Electronic Parts	Energy Meter	MID certified 3-phase energy meter per output		
Protective Devices		Surge Protection SPD Type 2			
		RCD (Residual Current Protection) Type B with AC leakage detection 30mA and DC smooth current detection 6mA for each output (2x RCD Type B)			
		Overvoltage (OVP) & Undervoltage (UVP) Protection			
		Ground Loss Detection			
		Overtemperature Protection (OTP)			
Communication Protocol		S2W & OCPP 1.6 JSON			
Language Menu		Greek, English			
User Identification		RFID & phone app			
Charging	Connectivity	WIFI & Ethernet or GSM			
	Charging Outlets	Ability to charge 2 vehicles simultaneously to the maximum power of 11kW each output (total 22kW)		Ability to charge 2 vehicles simultaneously to the maximum power of 22kW each output (total 44kW)	
Installation	ATEX	Installation outside ATEX zones			
	Cooling	Forced Air Cooling			
	Grid Substation	Not applicable			
	Cable Cross Section	5x10mm2(cable length up to 100m), 5x16mm2 (cable length up to 150m)		5x16mm2(cable length up to 150m), 5x25mm2 (cable length >150m)	
	EN Regulations	LVD 2014/35/EU, IEC EN 61851-1:2017, IEC EN 61851-1:2019 IEC 61851-21-2:2018, EN 62196-1:2014, EN 62196-2:2016, 2014/30/EU, EMC EN 61000, CE			
Certification	Warranty	2 years			

* Capability to have anti-corrosion primer, anti-graffiti paint, different metal enclosure (ex, AISI 316L) or branding at the whole surface of the charging station with ground mounted base,

** All models (PRISMA 2x11CG-7m, PRISMA 2x22CG-7m) are available with 7m length tethered cable.



Thessaloniki-Gorgopotamou
P.C. 570 22, Thessaloniki Industrial Area Sindos, Greece

t: (+30) 231 60 200 47
e: info@mc-chargers.com
www.mc-chargers.com



Official Distributor: